

Refrigerated Display Cabinet Test Report

Test Laboratory Name/Address
 Laboratory of FROST TECH(Guangzhou) Refrigeration Facilities CO.,LTD.
 Xiaowu Industrial Zone Dongchong Town,Nansha District,Guangzhou,
 Guangdong Province,P.R.China.

Manufacturing Name/Address
 FROST TECH(Guangzhou) Refrigeration Facilities CO.,LTD.
 Xiaowu Industrial Zone Dongchong Town,Nansha District,Guangzhou,
 Guangdong Province,P.R.China.

Brand Name	FROST TECH
Product	Refrigerated display cabinet
Description	The product covered by this report is a commercial used, cord connected refrigerated display cabinet.
Model(s)	ECO P60/120
Voltage/Frequency	220-240V,50Hz
Rating current	3.5A
Drip tray Rating current	n/a
Teststandard(s)orcriteria(s)	(EU)2019/2018 (EU)2019/2024 ENISO23953-2:2015

Conclusion
 The results are in compliance with the requirements of the EC regulation 2019/2024.
 Energy efficiency class: C

Prepared by: He Jianjin

Photo 1 - Front view:




Name plate:

COMMERCIAL DISPLAY CABINET	
Model	ECO P60/120
Voltage/Frequency	220-240/50Hz
Rating current	3.5A
Refrigerant	R404A-R452A (R290 Available)
Compressor	Tecumseh AE4470Z
Controller	DIXEL XR02CX
Vesicant	CO2

Name: FROST TECH

Address: Xiaowu Industrial Zone Dongchong Town, Nansha

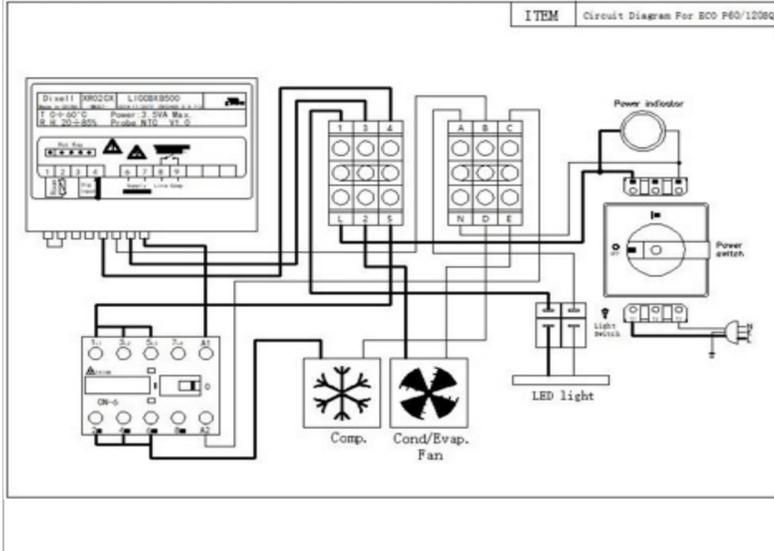

Product details:

Cabinet family code	VC2
Cabinet type	Integral
Model number of Unit Under Tested	ECO P60/120
Brand name	FROST TECH
Operating temperature(s)	Chilled
Category	Vertical and combined supermarket refrigerator cabinets
Energy efficiency class	C
Climate class	3
M Package Temperature Class	M2
Doors	Rear Sliding Doors.
Shelves	3 Toughened glass shelves
Light	LED tube
Refrigerant	R404A-R452A (R290 Available)
Charge of refrigerant(g)	350
Over all dimensions(W*D*H)[mm]	1200*600*1185

Performance parameter:

Highest temperature of the warmest M-package of the compartment(s) with chilled operating temperatures (°C)	+7
Lowest temperature of the coldest M-package of the compartment(s) with chilled operating temperatures, or the highest minimum temperature of all M-packages of the compartment(s) with chilled operating temperatures (°C)	-1

Critical Components:

Name	Manufacturer/trademark	Type/model	Technical data
Compressor	TECUMSEH	AE4470Z	220-240V,50Hz
Controller	DIXEL	XR02CX	220-240V,50Hz

Test Condition:


Dry Bulb	25±1°C
Relative humidity	60±3%
Input Voltage	230V
Input Frequency	50Hz

Temperature and total display area Tests:

Temperature Class	Symbol	Temperature Test (°C)			Total display area test (m ²)
		Temperature	Limit	Verdict	
M2	θah	5.9	≤7	Pass	1.48
	θb	1.2	≥-1	Pass	

Calculation for EEI and conclusion:

Total display area TDA(m ²)	1.48
M	9.1
N	9.100
P	1.1
Y	1.48
C	1
Calculation formula	SAE: 365*P*(M+N*Y)*C
Standard annual energy consumption SAE(Kwh/24h)	9061
Daily energy consumption E _{daily} (kWh/24h)	8.5
Annual energy consumption AE(kWh/a)	3102.5
Energy Efficiency Index EEI	34.2
Energy efficiency class	C
From 1 March 2021: EEI < 100, Ice-cream freezers: EEI < 80	Pass
From 1 September 2023: EEI < 80, Ice-cream freezers: EEI < 50	Pass

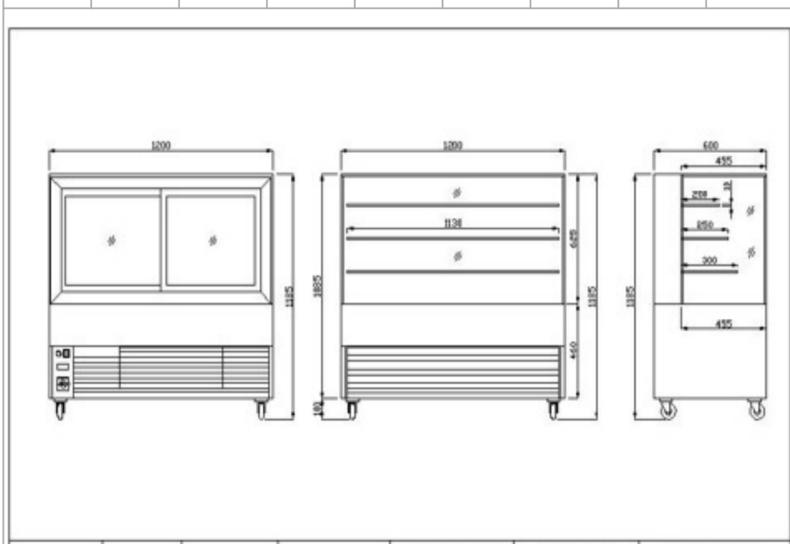

Type	Length	Depth	Height	Nom. voltage/frequency	Electrical fusing	Temperature range
ECO P60/120	1200 mm	600 mm	1185 mm	230 V/50 Hz	13A, slow	0 ... +7 °C

